

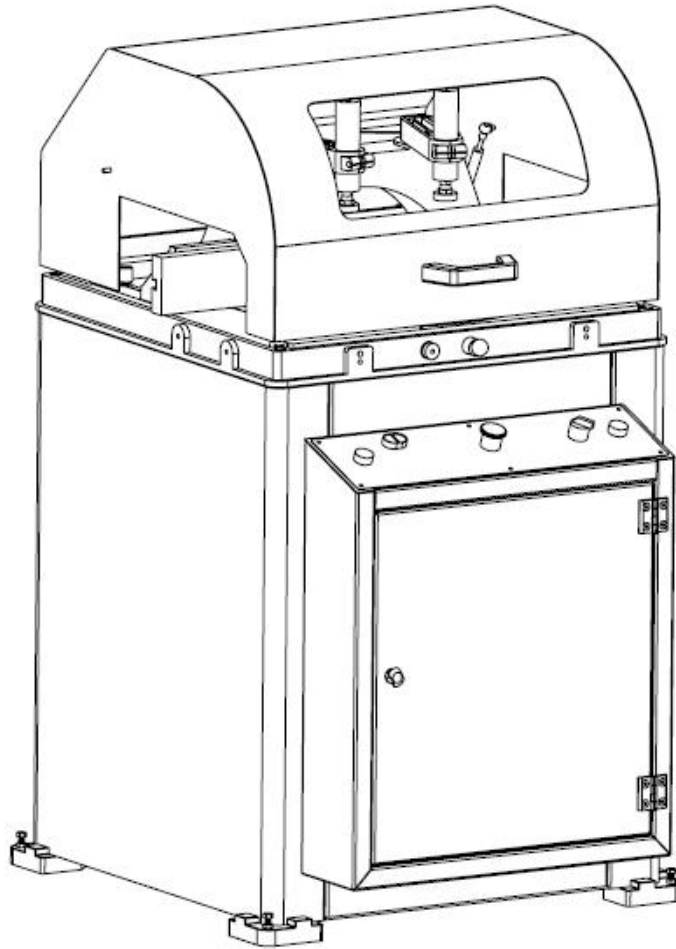


ASLAN
MACHINE
www.aslanmachine.com

USER'S MANUAL

AUTOMATIC UPCUT MITER SAW

CMS-504 series





ASLAN
MACHINE
www.aslanmachine.com

Aslan Machine, Inc.
A Distributor of Vinyl Window Machinery Products

204 23 Waters Point Lane
Germantown, MD 20874, USA

Tel: +1 301 528 1696 • Fax: +1 301 542 0185

🖥️:www.aslanmachine.com ✉️:info@aslanmachine.com

CONTENTS

1. General Information
1.1. Introduction
1.2. Distributor
2. Machine's Description and Purpose of Use
2.1. Machine's description
2.2. Technical features
2.3. Cutting diagram
2.4. Overall dimensions
2.5. Part lists and technical drawings for cutting mechanism
2.6. Electric and pneumatic control panel
3. Safety
3.1. Safety information
3.2. Accident prevention
3.3. General safety information
4. Safely Transporting the Machine
5. Installing the machine
5.1. Preparation
5.2. Electric connection
6. Machine Safety Information
7. Operation
7.1. Operating guide
7.2. Adjusting the air pressure
7.3. Checking angle adjustment of saw blade and bridge
8. Safe installation of the saw blade
9. Maintenance
9.1. Routine controls and maintenance
9.2. Maintenance at the end of the working day
10. Troubleshooting Guide
11. Electric / pneumatic components
11.1. Electric Components
11.2. Pneumatic Components
12. Wiring Diagrams
13. Pictorial guide to use when ordering parts for this machine.

1. GENERAL INFORMATION

1.1. INTRODUCTION

This user's manual contains necessary information about the machine and its parts. Each machine operator should read these instructions carefully, and the machine should be operated after fully reading this manual.

A safe and efficient use of this machine for long term depends on understanding and following the instructions contained in this manual. The technical drawings and details contained in this manual are a guide for the operator.

1.2. DISTRIBUTOR

Aslan Machine, Inc.
20423 Waters Point Lane, Germantown, MD 20874
Phone: +1-301-528-1696 Fax: +1-301-542-0185
Website: www.aslanmachine.com
E-mail: info@aslanmachine.com

In case of any technical problem, please contact us.

Technical identification label is on the front side of each machine.

The machine's serial number and manufacturing year are on the technical label.

2. MACHINE'S DESCRIPTION AND PURPOSE OF USE

2.1. MACHINE'S DESCRIPTION

This is an automatic upcut saw with a circular saw blade for cutting PVC, aluminum and wood profiles at straight and miter angles. The operator can adjust the cutting speed of the saw blade via a knob for the material type and the size.

The features of this machine:

- Cutting at fixed angles such as 15°, 22.5°, 30°, 45°, 90°, and at intermediate angles by setting arm. This machine has been designed according to CE Safety Directives.
- The movable back fence enables straight and miter cut for wide materials.
- The cutting speed can be adjusted manually for each material type.
- If the top safety cover and/or the front door is opened during a cutting operation, the saw blade moves down to its home automatically for safety.
- After the cutting is finished, the saw blade moves down automatically.

Please include the following information in all your correspondences.

- *Machine's model
- *Machine's serial number
- *Voltage and frequency
- *Name of dealer where machine was purchased
- *Date of purchase
- *Description of the machine fault
- *Average daily operation period



Figure – 1 General front view of the machine and its components.

Note: for safety reasons, the motor does not start moving up until the top safety cover and front door are closed.

2.2. TECHNICAL FEATURES













Technical Features (Metric)							
CMS-504-18	2.2kW 400V 50Hz 3-Phase	D=450 mm d=32 mm	3000 rpm	6-8 Bar	35 l/min	95x95x149 cm	210 kg
Technical Features (American)							
CMS-504-18	3 HP 3-Phase 220V/4610V 60Hz	D=17 1/2" d=32 mm	3000 rpm	90-120 psi	1 CFM	37"x37"x59"	450 lb

Table 1 - The technical features of this machine.

2.3. CUTTING DIAGRAM

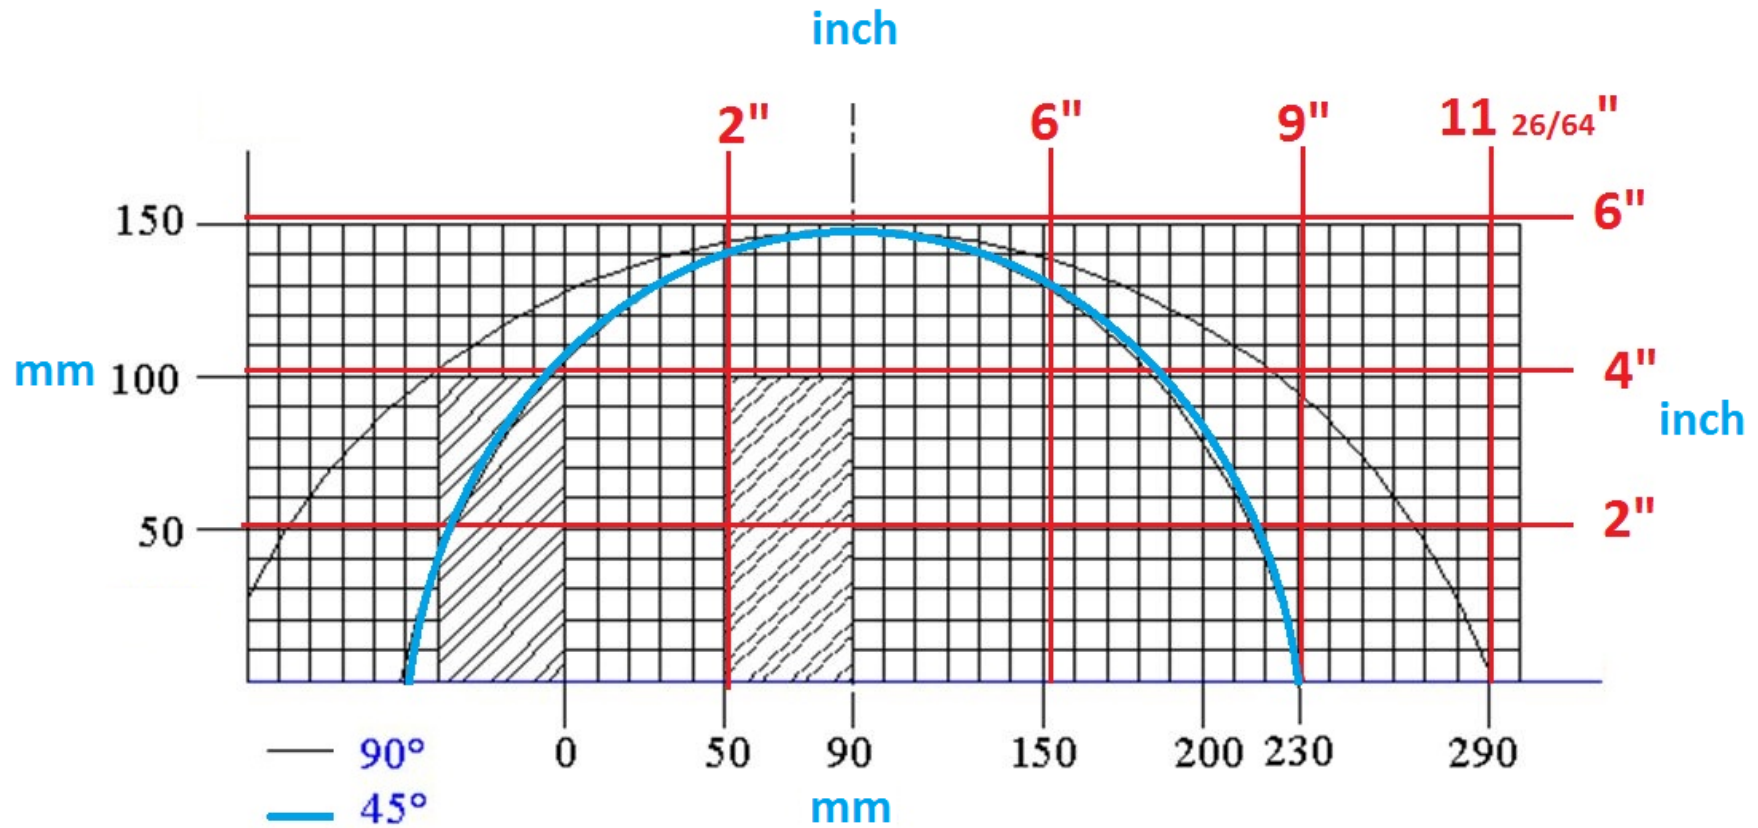


Figure - 2 Cutting Diagram.

2.4. OVERALL DIMENSIONS


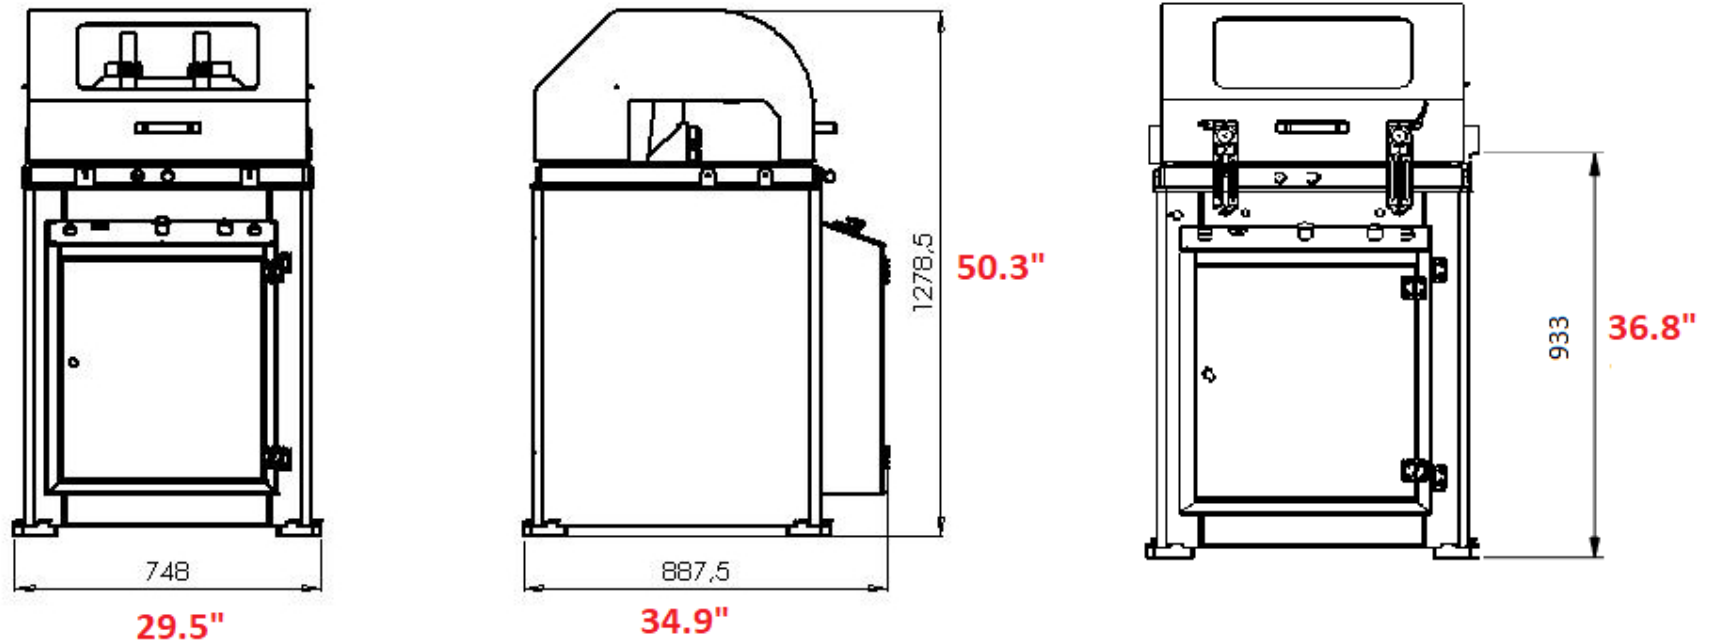


Figure - 3 Overall Dimensions
(in terms of millimeters and inch)

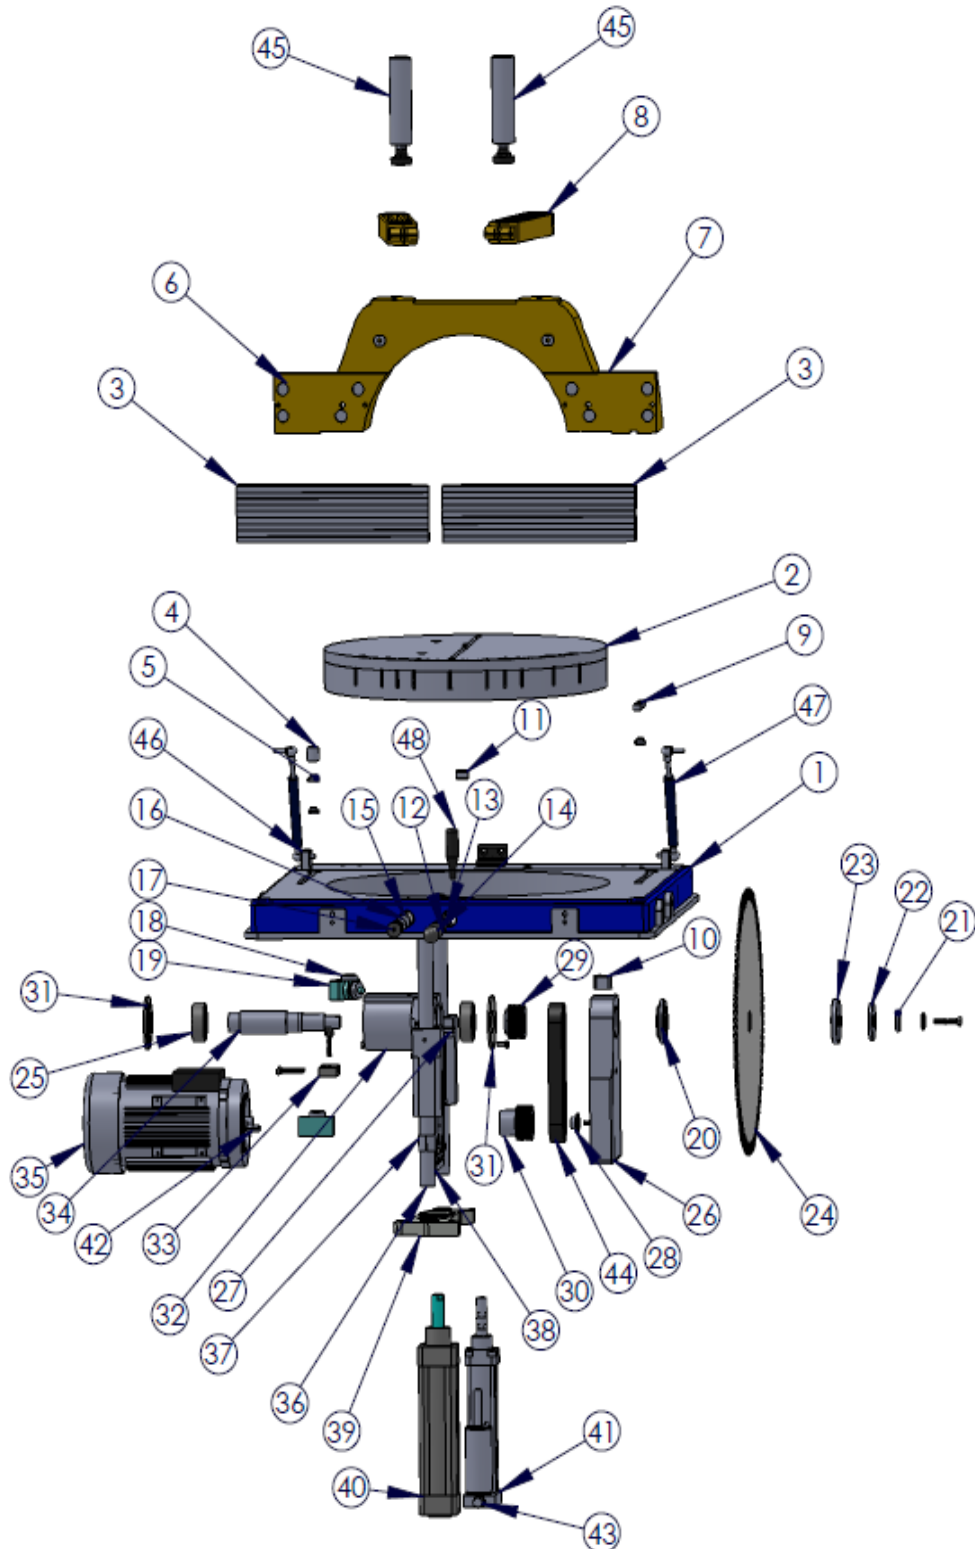2.5. PARTS LIST AND TECHNICAL DRAWINGS FOR CUTTING MECHANISM



PART NO	STOCK CODE	QUANTITY
1	150.002.0080	1
2	150.001.0094	1
3		2
4	150.02.0056	1
5	150.02.0068	2
6	150.02.0084	8
7	150.001.0047	1
8	150.001.0085	2
9	150.02.0093	1
10	150.02.0094	3
11	150.02.0109	1
12	150.02.0607	1
13	150.02.0583	1
14	150.02.0186	1
15	150.02.0001	1
16	150.02.0006	1
17	150.02.0021	1
18	150.006.0005	1
19	150.001.0048	3
20	150.02.0102	1
21	150.02.0119	1
22	150.02.0274	1
23	150.02.0118	1
24	150.011.0073	1
25	150.006.0051	2
26	150.001.0086	1
27	150.02.0120	4
28	150.02.0617	1
29	150.02.0401	1
30	150.02.0540	1
31	150.013.0059	2
32	150.001.083	1
33	150.02.0121	1
34	150.02.0122	1
35	150.014.0015	1
36	150.005.0014	2
37	150.006.0114	1
38	150.02.0672	1
39	150.001.0090	1
40	150.010.0060	1
41	150.010.0017	1
42	150.02.0123	1
43	150.02.0133	1
44	150.011.0062	1
45	150.010.0010	2
46	150.02.0370	2

47	150.010.0058	2
48	150.02.0720	1

Figure -4 Parts list
(see the rest of the manual for all other components)


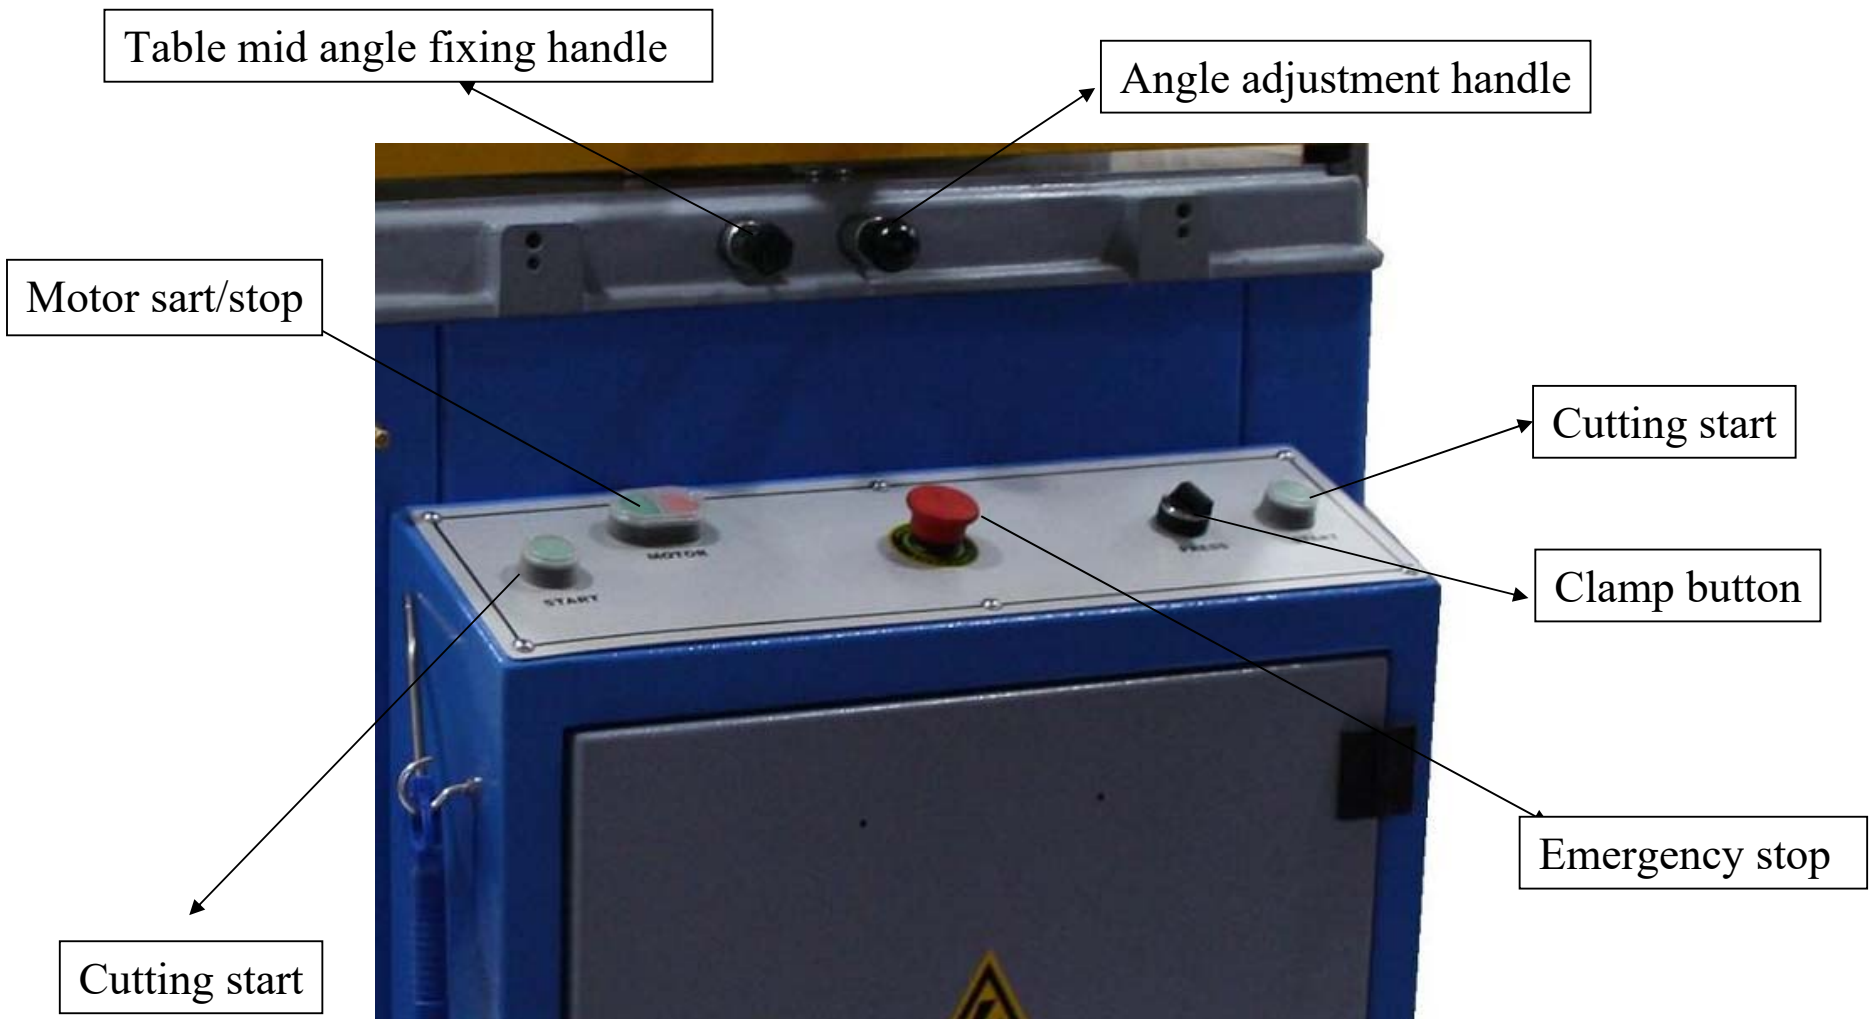


Figure - 5 Machine control panel

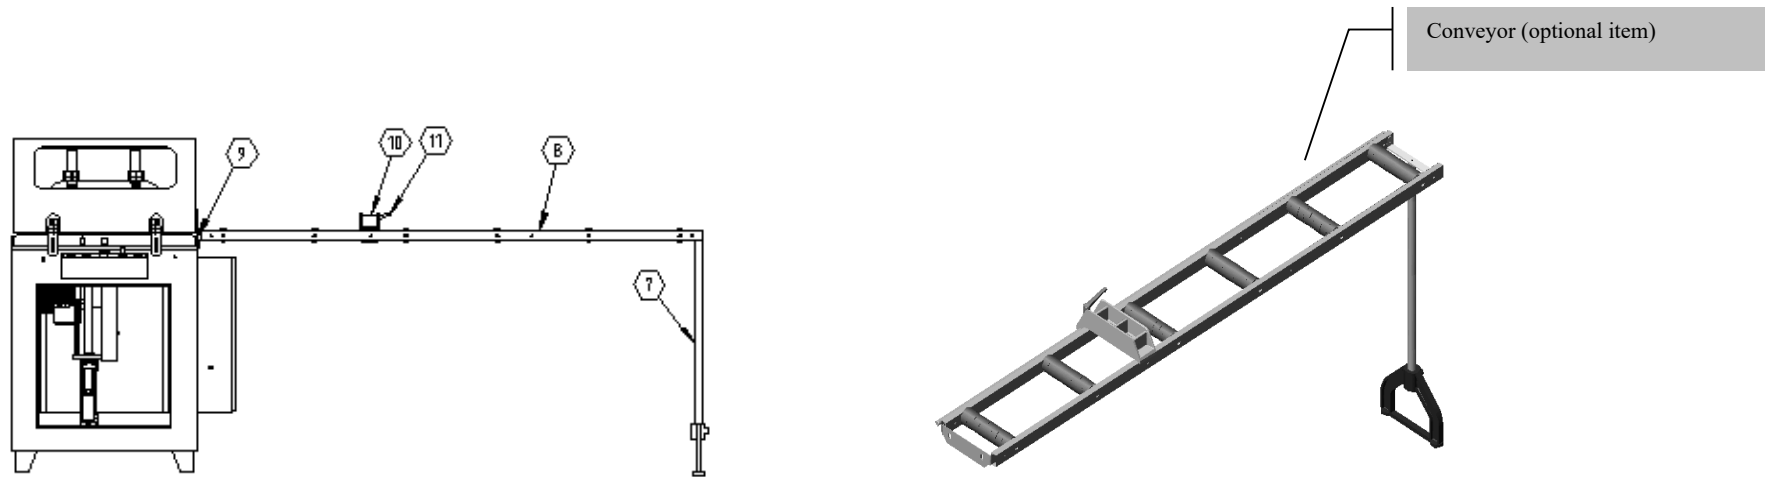

NO	PART NAME	QTY
7	Conveyor Foot	1
8	Conveyor Profile	2
9	M8 x 20 Bolt	2
10	Profile Support	1
11	M10 Handle	1

Figure – 6 A Typical conveyor attachments

(This is an optional feature and the conveyor supplied to you might be also different than this, please check with us about how to connect your conveyor to the machine.)

2.6. ELECTRIC AND PNEUMATIC CONTROL PANEL

The electric and pneumatic control panel enables you to make adjustments regarding the air pressure.

The cover of the panel has to be kept closed/locked during cutting.

Before servicing the machine: TURN OFF THE ELECTRIC AND PNEUMATIC SUPPLY CONNECTIONS.

For safety, the air pressure safety switch located inside the electric panel deactivates all pneumatic components in case the air pressure drops below 60 psi (4 Bar).

If the air pressure is less than 60 psi, the saw blade and pneumatic clamps will not operate.

3. SAFETY

3.1. SAFETY INFORMATION

The symbols shown hereunder must be read with a special attention. Not reading or observing them may cause damage to the equipment or personal injury.

IMPORTANT

The **IMPORTANT** symbol above shows that it is necessary to pay special attention at the specified operation.

CAUTION !

The **CAUTION!** symbol above warns you against specific dangers, and requires reading the text. Not observing may cause damage to the equipment.



DANGER WARNING

The **DANGER WARNING** symbol warns you against specific dangers, and you have to read them. Negligence may cause damage to the equipment and bodily injury.

Read the user's manual carefully before using the machine or carrying out maintenance works.



3.2. ACCIDENT PREVENTION

3.2.1. Our machines are manufactured in accordance with EN 60204-1 and EN 292-2 CE safety directives, which international safety directives.

3.2.2. It is the responsibility of the employer to warn his staff against accident risks, to train them on prevention of accidents, to provide the necessary safety equipment and devices for the operator's safety.

3.2.3. Before starting to work with the machine, the operator should check the features of this machine; learn all details of the machine's operation.

3.2.4. Machine should be operated only by the assigned and properly trained staff members, who have read and understood the contents of this manual.

3.2.5. All directives, recommendations and general safety rules contained in this manual have to be observed fully. The machine cannot be operated in any way for purposes other than those described herein. The manufacturer shall not be deemed responsible for any damages or injuries due to wrong/unsafe usage. And such circumstances would lead to the termination of the warranty.

3.3. GENERAL SAFETY INFORMATION

3.3.1. The power cable should be placed in a way that nobody can step on it or nothing can be placed on it. Special care must be taken regarding the inlet and outlet sockets.



3.3.2. If the power cable is damaged during operation, don't touch it and do not unplug it. Call your electrician to resolve the problem. Never use damaged power cables.

3.3.3. Don't overload the machine. Your machine will operate more safely with power supply shown on the technical label.

3.3.4. Don't place your hands between parts in motion.



3.3.5. Use protective eye glasses and ear plugs. Don't wear oversize clothes and jewelry. These can be caught by moving parts.



3.3.6. Keep your working place always clean, dry and tidy for accident prevention and safe operation.

3.3.7. Use correct illumination for the safety of the operator. (ISO 8995-89 Standard The Lighting of Indoor Work Systems)

3.3.8. Don't leave anything on the machine.

3.3.9. Don't use any materials other than those recommended by the manufacturer for cutting operations on the machine.

3.3.10. Ensure that the work piece is clamped appropriately by the machine's clamp or vice.

3.3.11. Use safe working position, always keep your balance.



3.3.12. Keep your machine always clean for safe operation. Follow the instructions at maintenance and replacement of accessories. Check the plug and cable regularly. If damaged, have it replaced by a qualified electrician. Keep handles free from any oil and grease.

3.3.13. Unplug first before any maintenance works.

3.3.14. Make sure that any keys or adjustment tools are removed before re-operating the machine.

3.3.15. If you are required to operate the machine outside, use only appropriate extension cables.

3.3.16. Repairs should be done by a qualified technician only. Otherwise, accidents may occur.

3.3.17. Before starting a new operation, check the appropriate function of protective devices and tools, make sure that they work properly. All conditions have to be fulfilled to ensure proper operation of your machine. Damaged protective parts and equipment must be replaced or repaired properly (by the manufacturer or dealer).

3.3.18. Don't use this machine with improper functioning buttons and switches.

3.3.19. Don't keep flammable, combustible liquids and materials next to the machine and electric connections.

4. SAFELY TRANSPORTING THE MACHINE

IMPORTANT

The transporting must be done by qualified personnel only.

The machine should be transported by lifting with proper equipment (The machine should not be touching the ground during the transport).

Don't lift the machine before making sure that lifting devices or other equipment is placed properly under the machine.

5. INSTALING THE MACHINE

The machine should be located at least 2 feet (50 cm away) from the back wall for the full opening of the top safety cover to the back, and to do maintenance and cleaning works on the machine. For the required minimum free distances around the machine, see Figure-6.

5.1. PREPARATION

5.1.1. The outer dimensions of the machine are shown in the Dimensions page in this manual. The ground where the machine will be placed, should be even and solid enough to bear the weight of the machine.

5.1.2. At this up-cut saw, all parts are delivered ready for use.

5.1.3. Assemble the optional conveyors, if you received it, to the right side of the machine as shown in Figure-6.

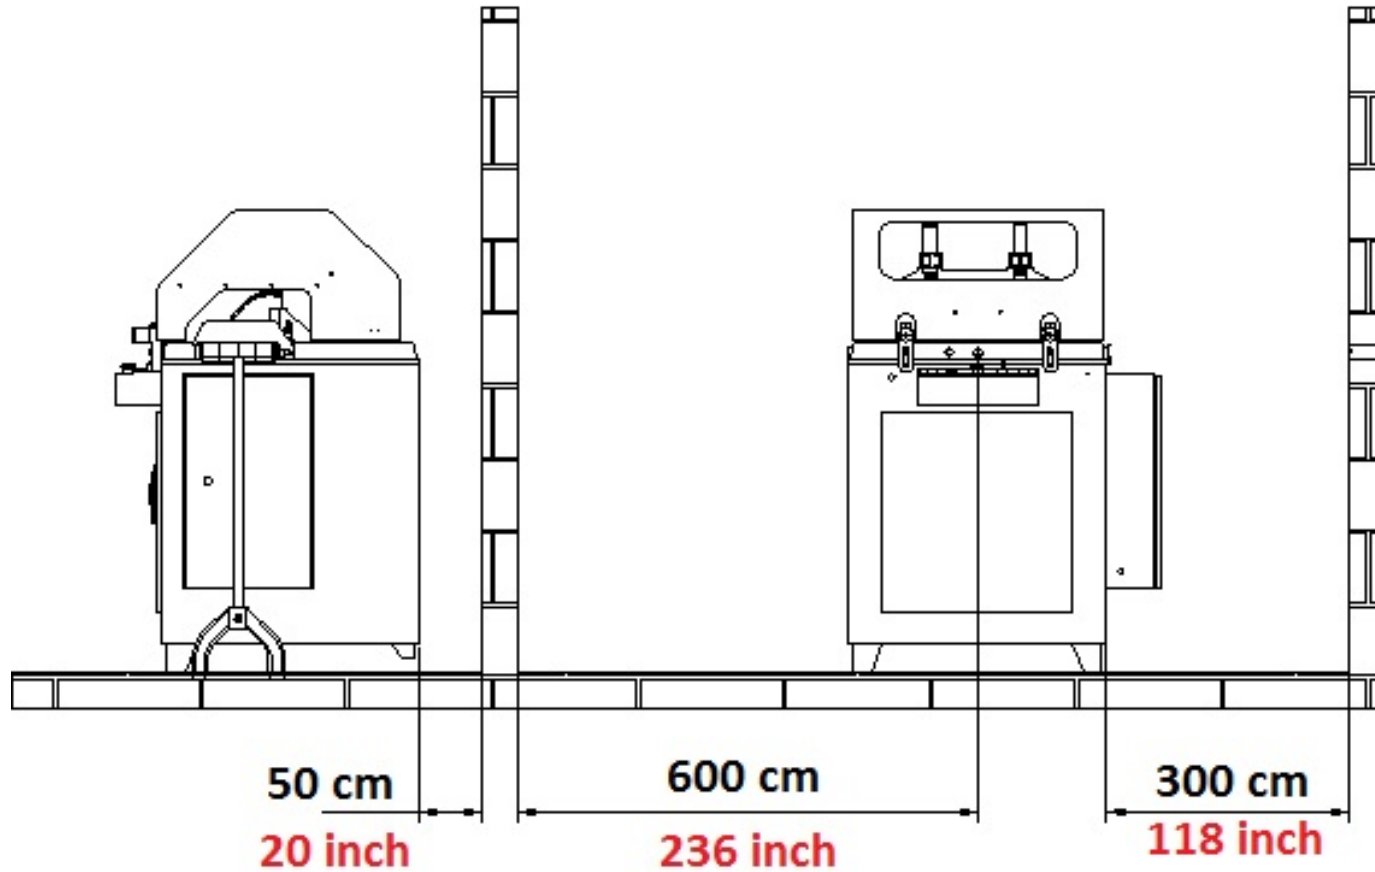


Figure – 8 Typical safe distances around the machine (when installed without the optional conveyor)
 Please add also the conveyor distance if you ordered it.

5.2. ELECTRIC CONNECTION

5.2.1. The three-phase power cable socket must be installed by your electrician.

5.2.2. Check the power supply before powering the machine.

5.2.3. Make the electric socket connections when the MAIN POWER SWITCH on the machine is set to 0. (i.e. cut the power going to the machine.)

CAUTION !

***The power connection must be made by a qualified electrician. The rotation direction of the saw blade must be observed by starting the machine. If the saw blade rotates in reverse direction, the connections must be checked and re-connected properly.**

****If the saw blade rotates in reverse direction, it will create danger for the operator and the equipment.**

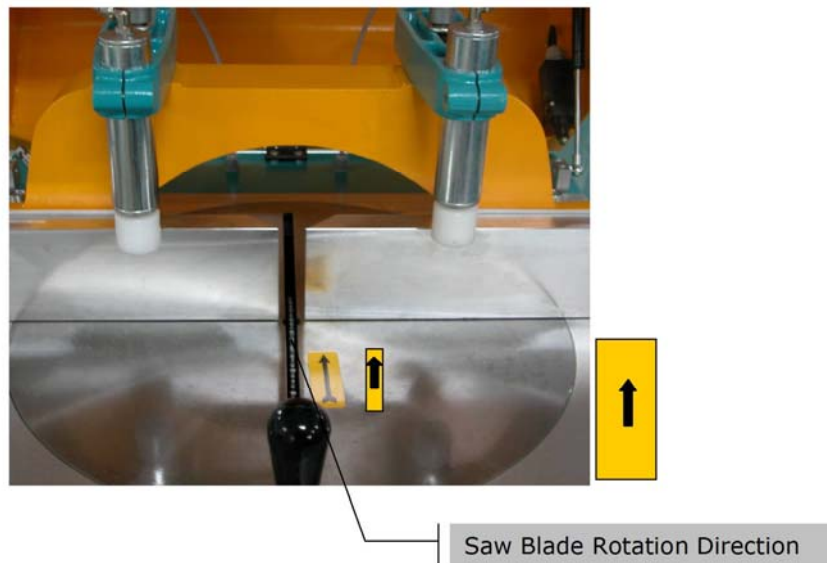



Figure - 9 Saw blade direction must be correct for safe operation.

To correct the rotation direction of the saw blade, connect the machine to an electric power plug for 3-phase, and follow these instructions:

1. Press the Motor Start Button to operate the saw blade.
2. Monitor the rotation direction of the saw blade through the blade slot.
3. The correct direction is shown with an arrow on the picture given on Figure-9.

The cable connections must be checked and corrected by a qualified electrician.

The rotation direction of the saw blade must be determined with testing and checking during installation by a qualified electrician.

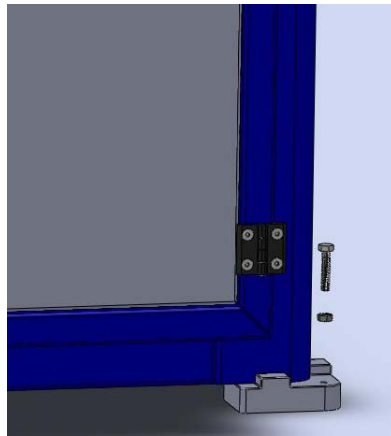


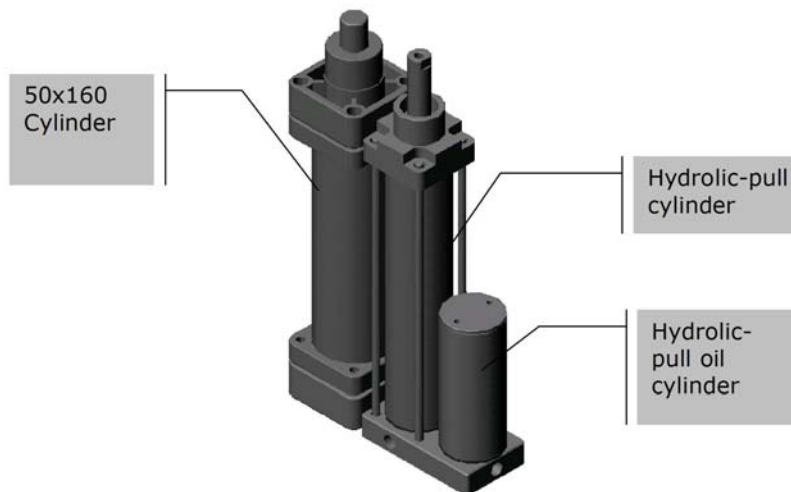


Figure - 10 Hydrolic-pneumatic system of the machine.

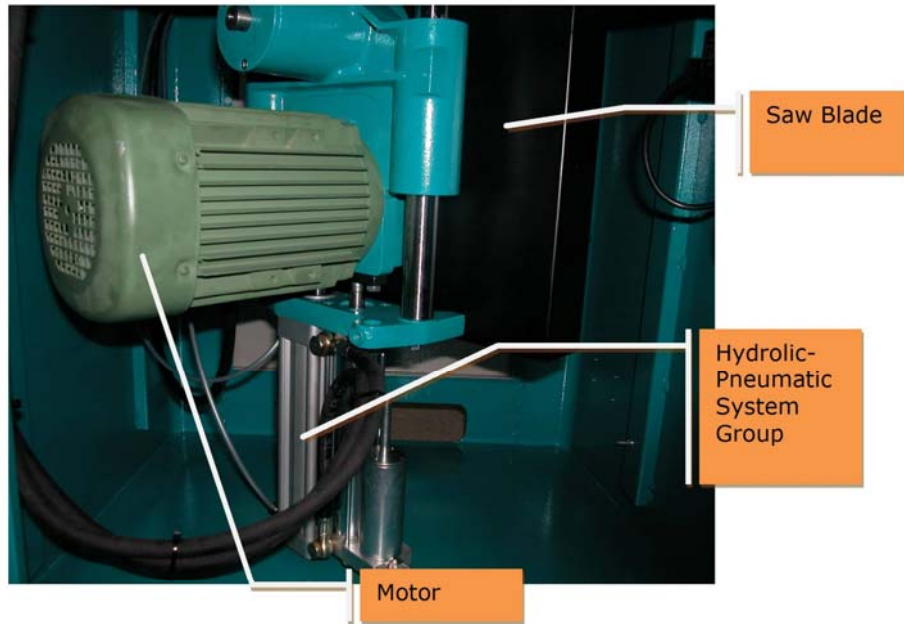

6. MACHINE SAFETY INFORMATION

- 6.8.1. It is not allowed to operate the machine with its safety cover and other safety components removed.
- 6.8.2. Your machine operates with 220 V or 400V (440V) ~ 3 Phase 50Hz (60Hz). Use a qualified electrician only for the installation.
- 6.8.3. Lifting, installation, electric, pneumatic maintenance of the machine must be done by qualified personnel only.
- 6.8.4. Routine maintenance and scheduled maintenance should be done by qualified personnel after disconnecting the power and air supply first.
- 6.8.5. Make sure that the machine is cleaned, tested and maintained before starting to operate.
- 6.8.6. Check the safety components, power cable and moving parts regularly. Don't operate the machine before replacing defective safety devices or faulty parts.
- 6.8.7. Never replace the saw blade without disconnecting the power first.
- 6.8.8. Keep foreign materials away from the working area of the machine,
- 6.8.9. Keep away from the machine's moving parts.

IMPORTANT

The safety data is defined above. In order to prevent any physical damage or damage to the equipment, please read the safety information carefully and keep the user's manual always in an easy accessible place.

7. OPERATION

The automatic up-cut saw model CMS-504 cuts non-ferrous aluminum, PVC profiles and PVC materials. The operator adjusts (manually via knob) the cutting speed according to the material type. Inner and outer sharp edges of a carbide tipped circular saw blade ensures high quality clean cutting results.

CAUTION !

7.1.1. Start the machine only after properly clamping piece to be cut.

7.1.2. The machine is equipped with vertical clamps. These vertical pneumatic clamps can be adjusted very easily according to the material.

7.1.3. The clamp piston of pneumatic clamps moves 55 mm (2.2 inches).



7.1.4. Avoid randomly pressing the buttons on the panel. If you feel danger during the cutting operation, push the emergency stop button immediately, which will terminate the operation.

7.1.5. Close the front door on the main frame and the control panel, and lock then with key. (For safety reasons, the motor will not start unless the main frame front door is closed)

NOTE: The main frame front door and the rear panel cover can be opened only during maintenance and cleaning of the machine. During maintenance, cut the power to the machine by switching the MAIN SWITCH to "0" before opening the covers/doors.

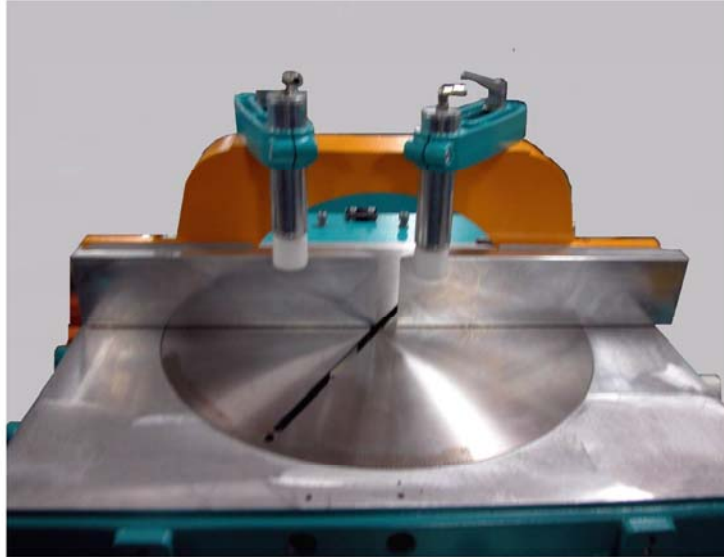
7.1.6. If the material is wide and high, you can move the back fence to the rear stop pins by loosening the M8 screws. The back fence bridge can be moved up to 100 mm (4") to the back. (See Figure – 13) For maximum cutting dimensions and positions see the cutting diagram in this manual. Fix the bridge by tightening the M8 hexagonal screws.

NOTE: Ensure that the MAIN SWITCH is on "0" during this operation.

7.1.7. Adjust the cutting angle by using the scale located on the round machine table (15°-22.5°-30°-45°-90°). To turn the round table, release the table locking pin by rotating counter clockwise. Fix the desired (intermediate) angle with the angle adjustment lever (Figure -5). Fix the turning table by tightening the table locking pin (Figure - 5).

CAUTION !

NOTE: WHILE CARRYING OUT MITER CUTTING OPERATIONS ON THE MACHINE, MAKE SURE THAT THE CLAMP CYLINDERS AND RIGHT-LEFT MOVING FENCES REMAIN OUTSIDE OF THE CUTTING AREA. (Figure – 11)



CORRECT



WRONG

The clamping cylinders have to be outside of the saw blade's moving area.

Figure 11 The clamping cylinders must be at a correct position to prevent damage to the cylinders themselves.

7.1.8. if you purchased our optional conveyor, adjust the cutting length of the material by using the measuring system with length stop units on the conveyor (See Figure – 6). After adjusting the cutting length, fix the profile support fence by tightening the stopper on the conveyor.

7.1.9. Make sure that the work piece is clamped down by the vertical pneumatic clamps pressing the clamp button on the machine (See Figure - 5).

7.1.10. Start the saw blade by pressing the Motor Start Button (Figure – 5).

7.1.11. Press both Cutting Start Buttons simultaneously (Figure – 5) to move the saw blade.

7.1.12. The circular saw blade will rise and cut the material, and then will move down automatically after cutting is complete. It will continue to turn inside the machine cabin until the next cutting.

7.1.13. The rising speed of the saw blade can be adjusted manually (Figure – 5).

7.1.14. Press the clamp button to release the work piece.

IMPORTANT

NOTE: Adjust the air pressure between 6-8 Bar (90-120 psi). The air pressure is readable from the pressure gauge on the air conditioning unit. If the value on the gauge is less or more than the desired pressure, adjust the pressure between 6-8 Bar by turning the air pressure adjustment knob to the right or to the left as needed. (Figure – 12)

7.1.15. The conditioner unit collects the water from the air inside its cup in order to prevent damage to the pneumatic system components. Discharge this water periodically (at the end of each working day) by pressing or opening the button under the conditioner.

7.2. ADJUSTING THE AIR PRESSURE

7.2.1. Pull the adjustment knob of the conditioner upwards. (See Figure – 12)

a- Turn the knob in clockwise direction to increase the pressure

b- Turn the knob in counter clockwise direction to decrease the pressure

7.2.2. Once you read 6-8 Bar (90-120 psi) on the gauge, push the knob down and lock it in that position. See Figure - 12

7.1.3. The manufacturer recommends the following oils for the air conditioning unit:

TELLUS C 10

BP ENERGOL HLP 10

MOBIL DTE LIGHT

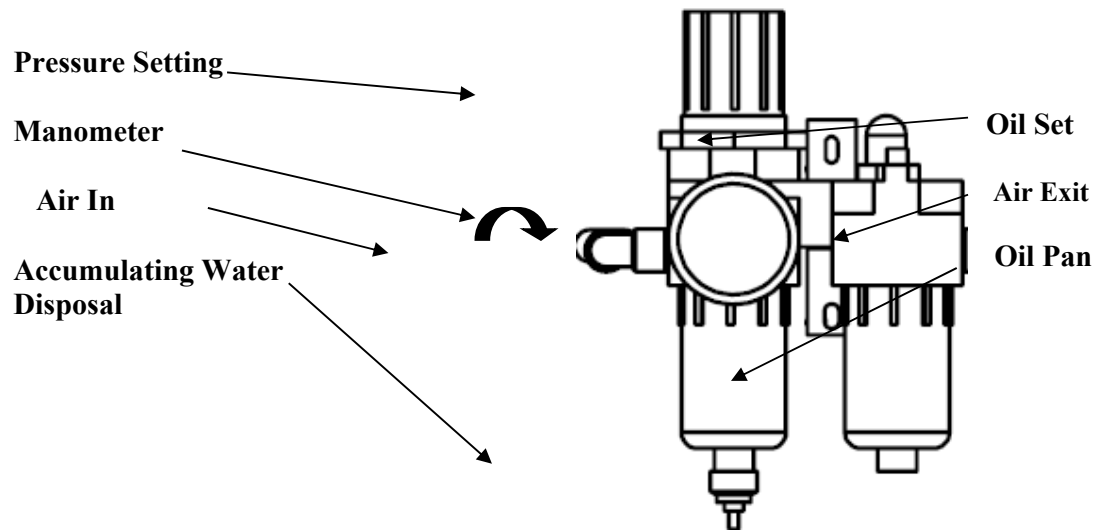


Figure - 12 Air conditioning Unit.

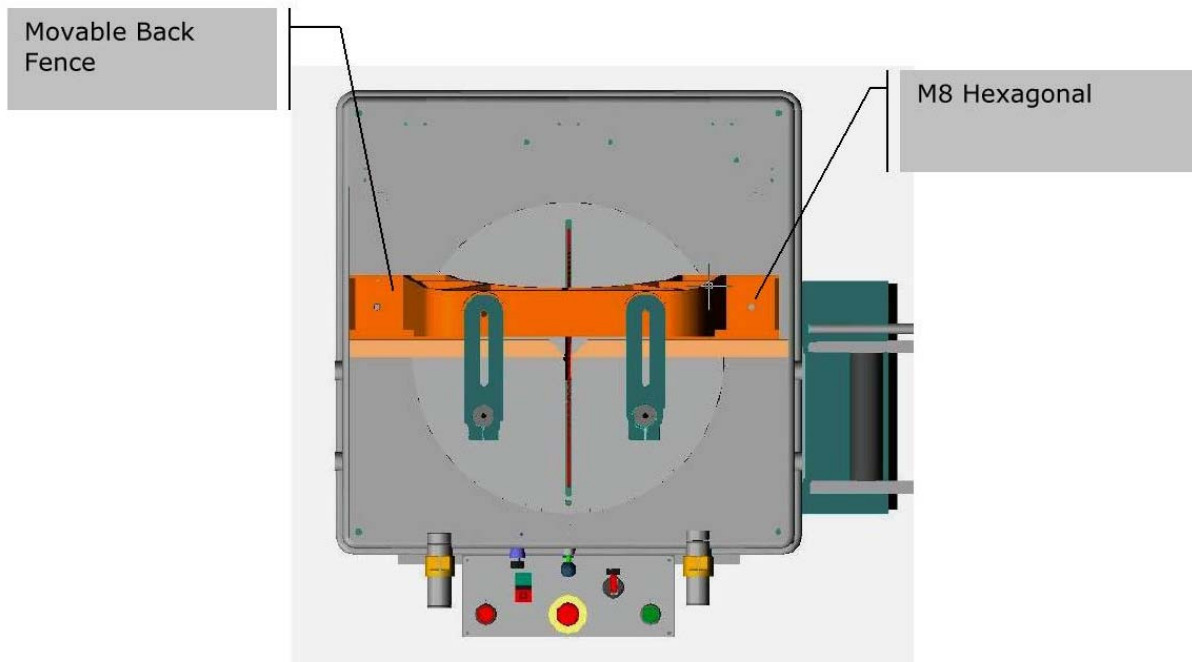


Figure – 13 Movable Back Fence (Bridge) System.

7.3. CHECKING ANGLE ADJUSTMENT OF SAW BLADE AND BRIDGE

If you run into any problem during cutting operation (i.e. miter cutting)

7.3.1. Perform a visual control on the saw blade, if possible with the help of a dial gauge.

7.3.2. Make sure that the alignment of the movable bridge is correct with the Back fence (Figure - 4, number 33). If not, align the movable bridge surface by adjusting its set screws at its back. (Figure - 4 no 40).

7.3.3. If the problem occurs during miter cutting, check the perpendicularity of the saw blade with the help of a quick square tool. If the perpendicularity is not correct, loosen the screw which tightens the angle adjustment pin. (Figure - 5) Turn the rotating round table so that the perpendicularity can be achieved and then fix position of the adjustment pin by tightening its screw.

8. SAFE INSTALLATION OF THE SAW BLADE

8.1 Follow the instructions below to remove the circular saw blade from the blade shaft.

8.1.1. Switch the MAIN POWER SWITCH on the machine to "0" to cut the power coming to the machine. Open the front cover of the main frame with its key.

8.1.2. Remove the four bolts on the saw blade guard with an appropriate wrench by turning counter-clockwise.

8.1.3. Remove the front cover of the saw blade guard by holding its handle.

8.1.4. Remove the M10 screw (In Figure 14) by turning it counter clockwise with an 8 mm Allen wrench. (Hold the saw blade shaft at the opposite end with a 17 mm wrench key and prevent the shaft from turning. (Figure – 14)

8.1.5. Remove the 30x8x7 mm washer, outer nut washer and the saw blade bracket 1 in an order. (See Figure – 15)

8.1.6. Remove the saw blade carefully.

8.1.7. Insert the new saw blade on the saw blade shaft, ensuring correct rotation direction. (See Figure – 9)

8.1.8. Insert the other parts (washer, outer nut washer and saw blade bracket 1) in reverse order as removal.

8.1.9. Tighten the M10 screw with an 8 mm Allen wrench by turning in clockwise direction. (Prevent the saw blade shaft from turning by holding it with a 17 mm wrench key.)

8.1.10. It is necessary to sharpen / replace the saw blade in certain intervals depending on the material. If the cut material leaves burr after the cutting operation or if the saw blade is strained, it needs to be sharpened / replaced.

CAUTION !

8.1.7 The blade washer is 32 mm. The saw metric blades come with 32 mm bore diameter. You can use this washer for both diameters by choosing the correct part on it.

When replacing the saw blade, use the part of the saw blade washer by matching the saw blade bore diameter (Figure – 15).

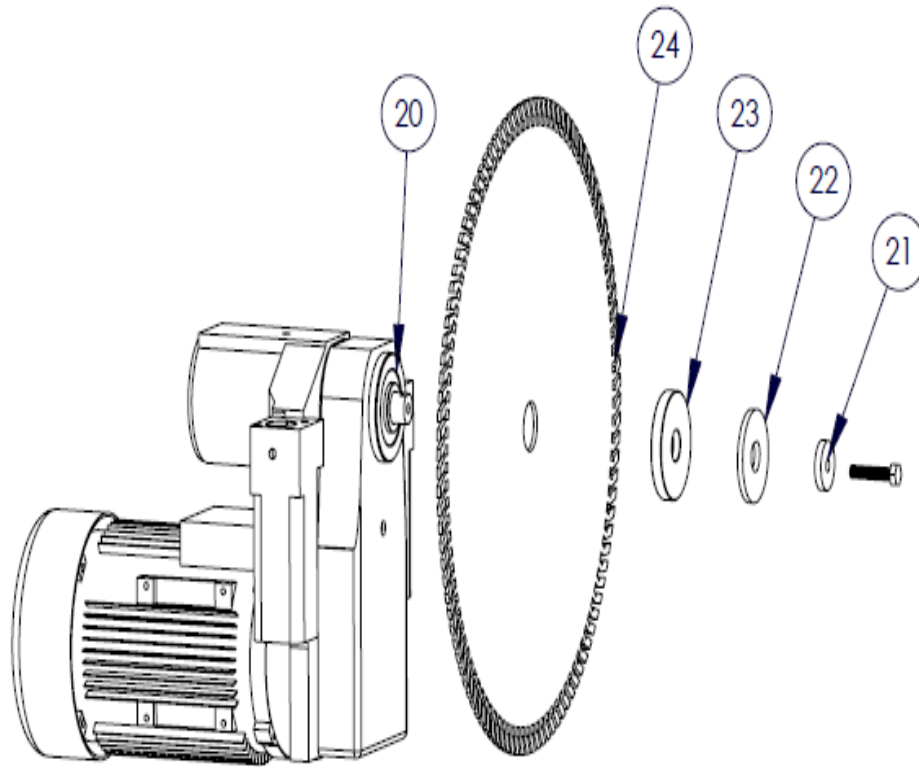


Figure – 14 Saw Blade Changing Steps.

See Figure 14.

Figure – 15 Saw Blade and Nuts assembly.

9. MAINTENANCE

9.1. ROUTINE CONTROLS and MAINTENANCE

9.1.1 BEGINNING THE WORK

9.1.1. Make sure that the table and all parts are clean and dry. Degrease and dry the table. Especially make sure that the holding grips are clean and dry.

9.1.2. Remove all burr, chips and foreign materials from all surfaces of the machine. Use protective eye goggles.



9.1.3. Check the saw blade before each use. Turn the saw blade carefully (after removing the blade guard) to see the teeth of the saw blade. Replace the saw blade if it is damaged.



9.1.4. Check the pressure of the air pressure system. If necessary, adjust the air pressure between 6-8 Bar (90 to 120 psi). (See section 7.2 for more information.)

9.1.5. Check the air pressure filters and the oil level in the conditioner jar. Fill it up if the oil level is low. (See section 7.2) **Unplug and disconnect the air pressure connections first, before carrying out these works.**

9.2. MAINTENANCE AT THE END OF THE WORKING DAY

9.2.1. Disconnect electric power and air power. (Main Power Switch must be on "0" position)

9.2.2. Remove all burr, chip and foreign materials from the machine surfaces. If it is necessary to clean the inside of the blade guard, remove the front cover, use gloves to protect your hands from the sharp edges of the blade.

9.2.3. If water or water based cooling liquids are used during cutting, dry the machine with a dry cloth after the operation is finished.

9.2.4. Apply a thin layer of machine oil to protect the table against corrosion. If the machine will not be used for a long time, lubricate it with a protective oil.

9.2.5. Don't use paint damaging materials/liquids for cleaning the machine.


9.2.6. Lubricate both surfaces of the saw blade with machine oil in order to protect it against corrosion.


10. TROUBLESHOOTING GUIDE


Here are some recommendations for solving urgent problems. If the trouble cannot be solved, or if you have a problem other than those described hereunder, please contact our technical service or your nearest dealer.


TROUBLE	CAUSES	REMEDY
Low cut surface quality (at aluminum and similar materials): <ul style="list-style-type: none"> • Rough surface • Large chips/shavings • Non-homogenous surface • Saw blade traces are visible. 	Saw blade surfaces are not cooled as needed.	<ul style="list-style-type: none"> • Lubricate the saw blade cutting surfaces. • Use cooling liquid.
	Damaged or blunt saw blade.	Check the saw blade teeth. Replace if necessary.
	Saw blade is moving up too fast.	The saw blade rising speed is too high for the material. Decrease it.
Motor does not work when Start button is pressed.	<ul style="list-style-type: none"> • No power supply to the machine. • Main Power Switch is in "0" position. • The upper safety cover or the front door is open. • Top safety cover safety switch and/or front door safety switch is faulty. 	<ul style="list-style-type: none"> • Check the electric cable connections. • Check the electric power sockets. Switch the Main Power Switch to "I". • Close the top safety cover and the front door. • Replace the safety switch.
Motor is working but the pneumatic clamp pistons do not work.	There is no air supply to the machine or the air pressure is below 4 Bar (60 psi).	<ul style="list-style-type: none"> • Check the air compressor connections. • Adjust the air pressure between 6-8 Bar (90-120 psi) on the conditioner.
The saw blade rotates in reverse direction.	The electric connection, at the power cable or the connection at the electric panel is wrong.	Call a qualified electrician to fix the problem.

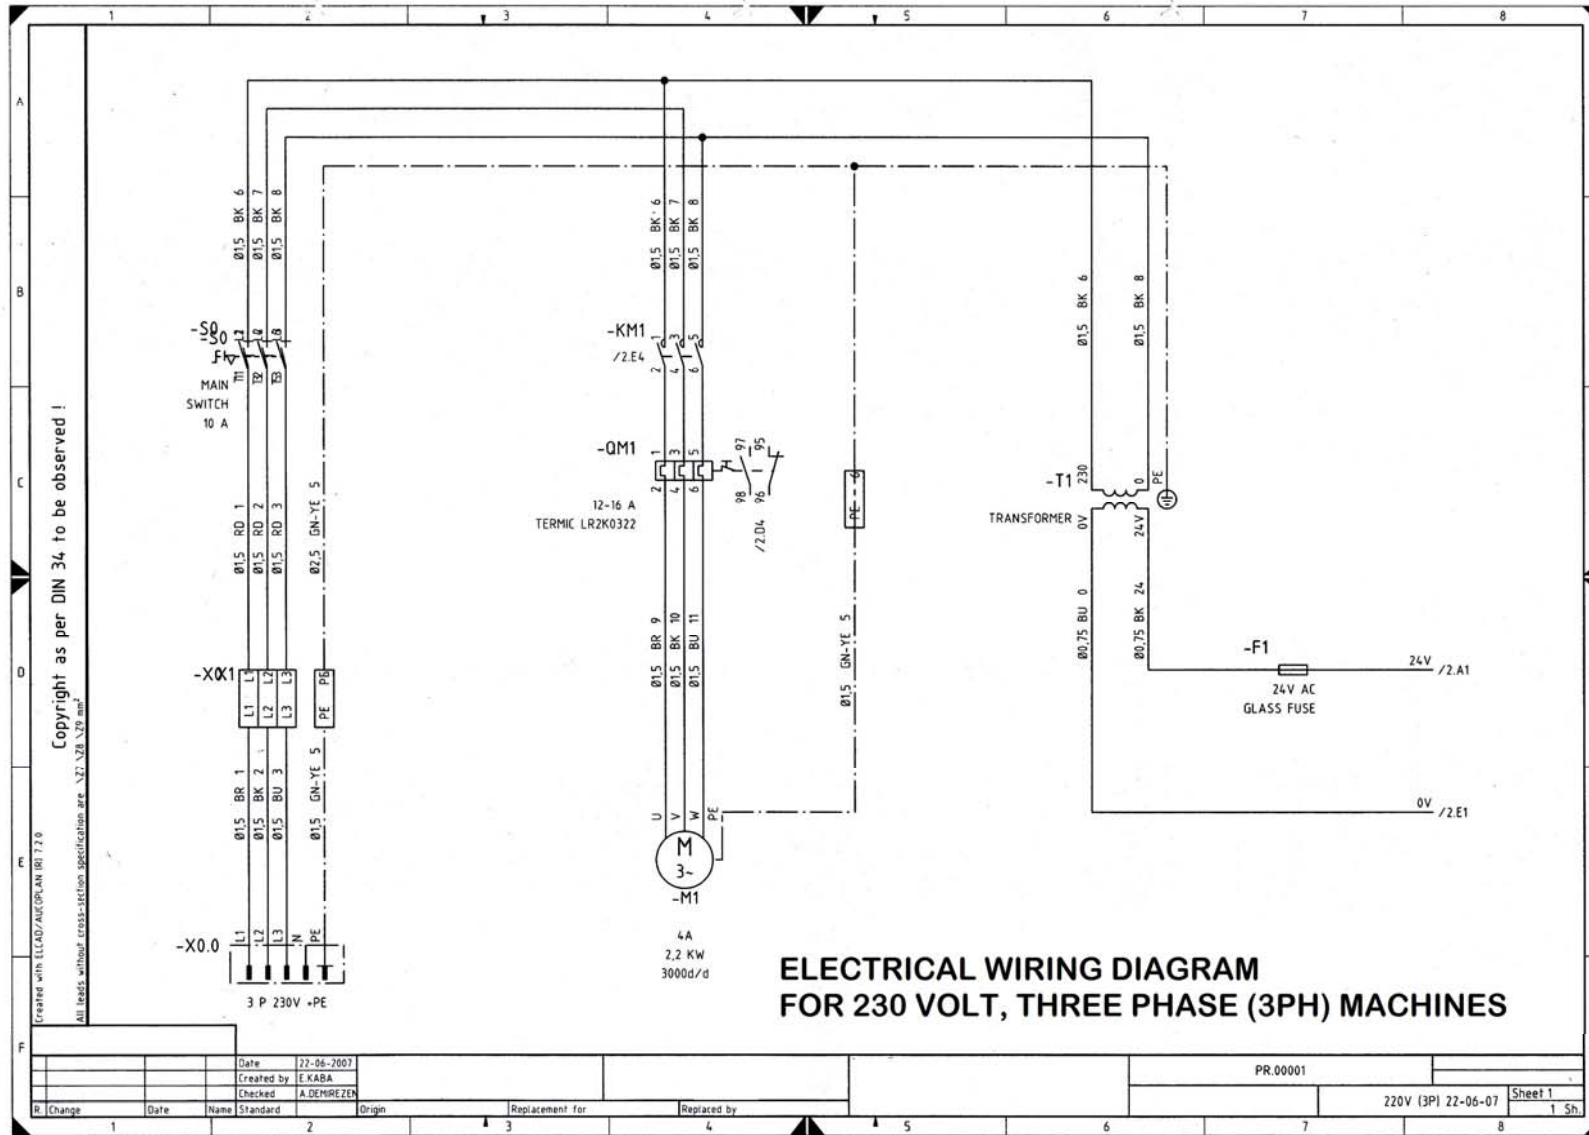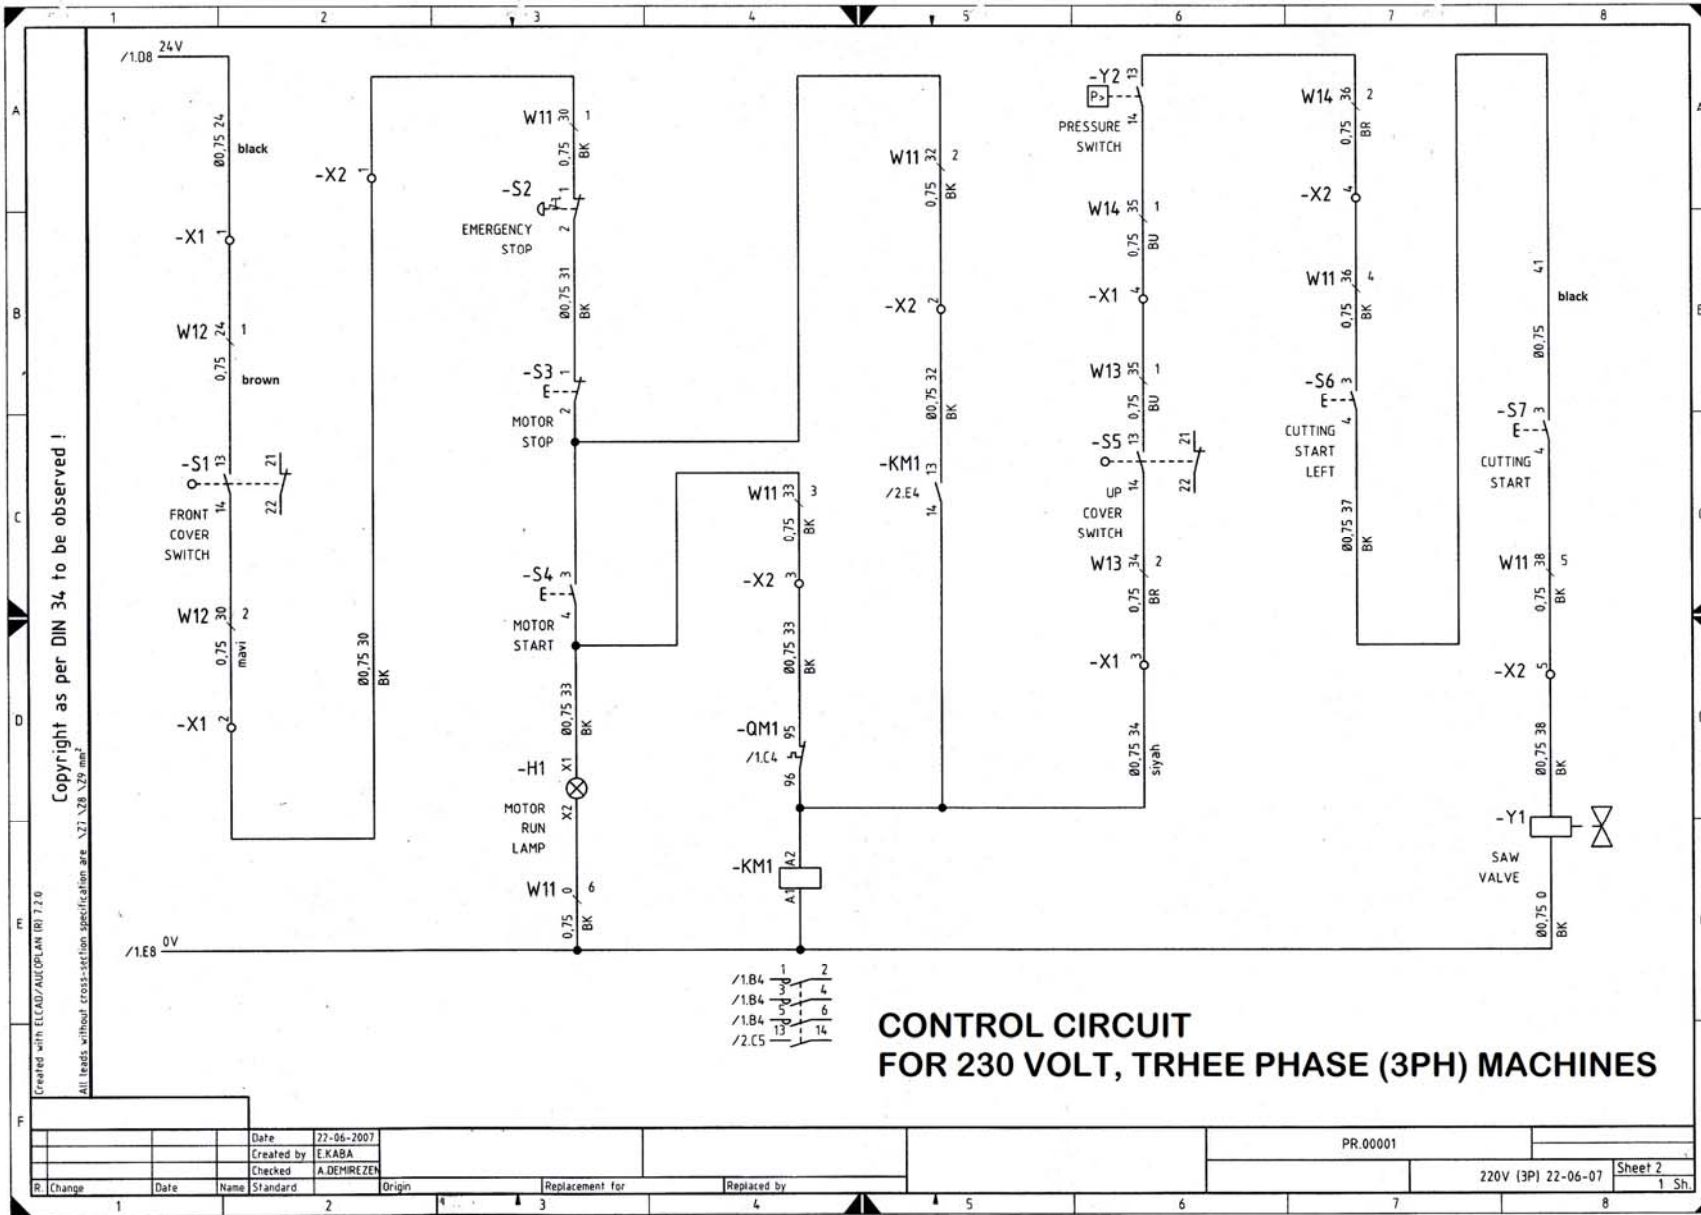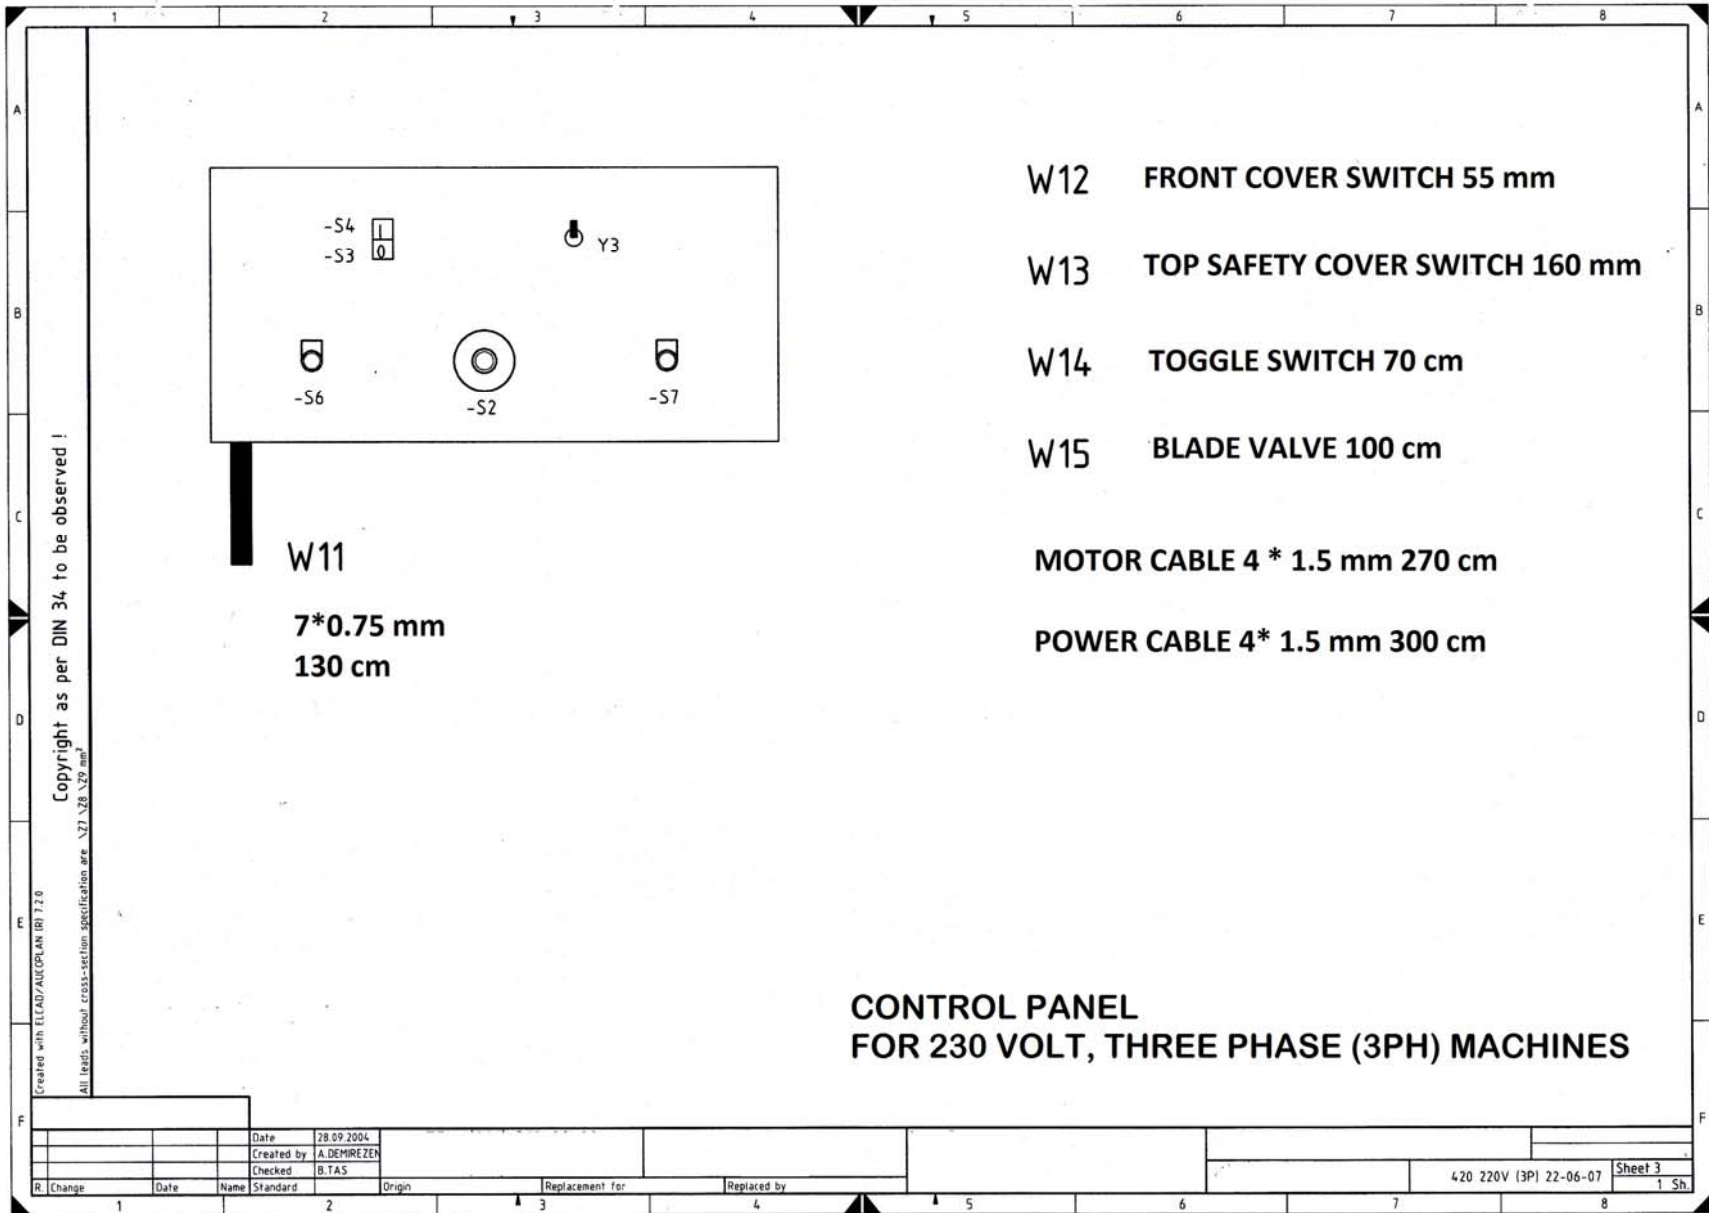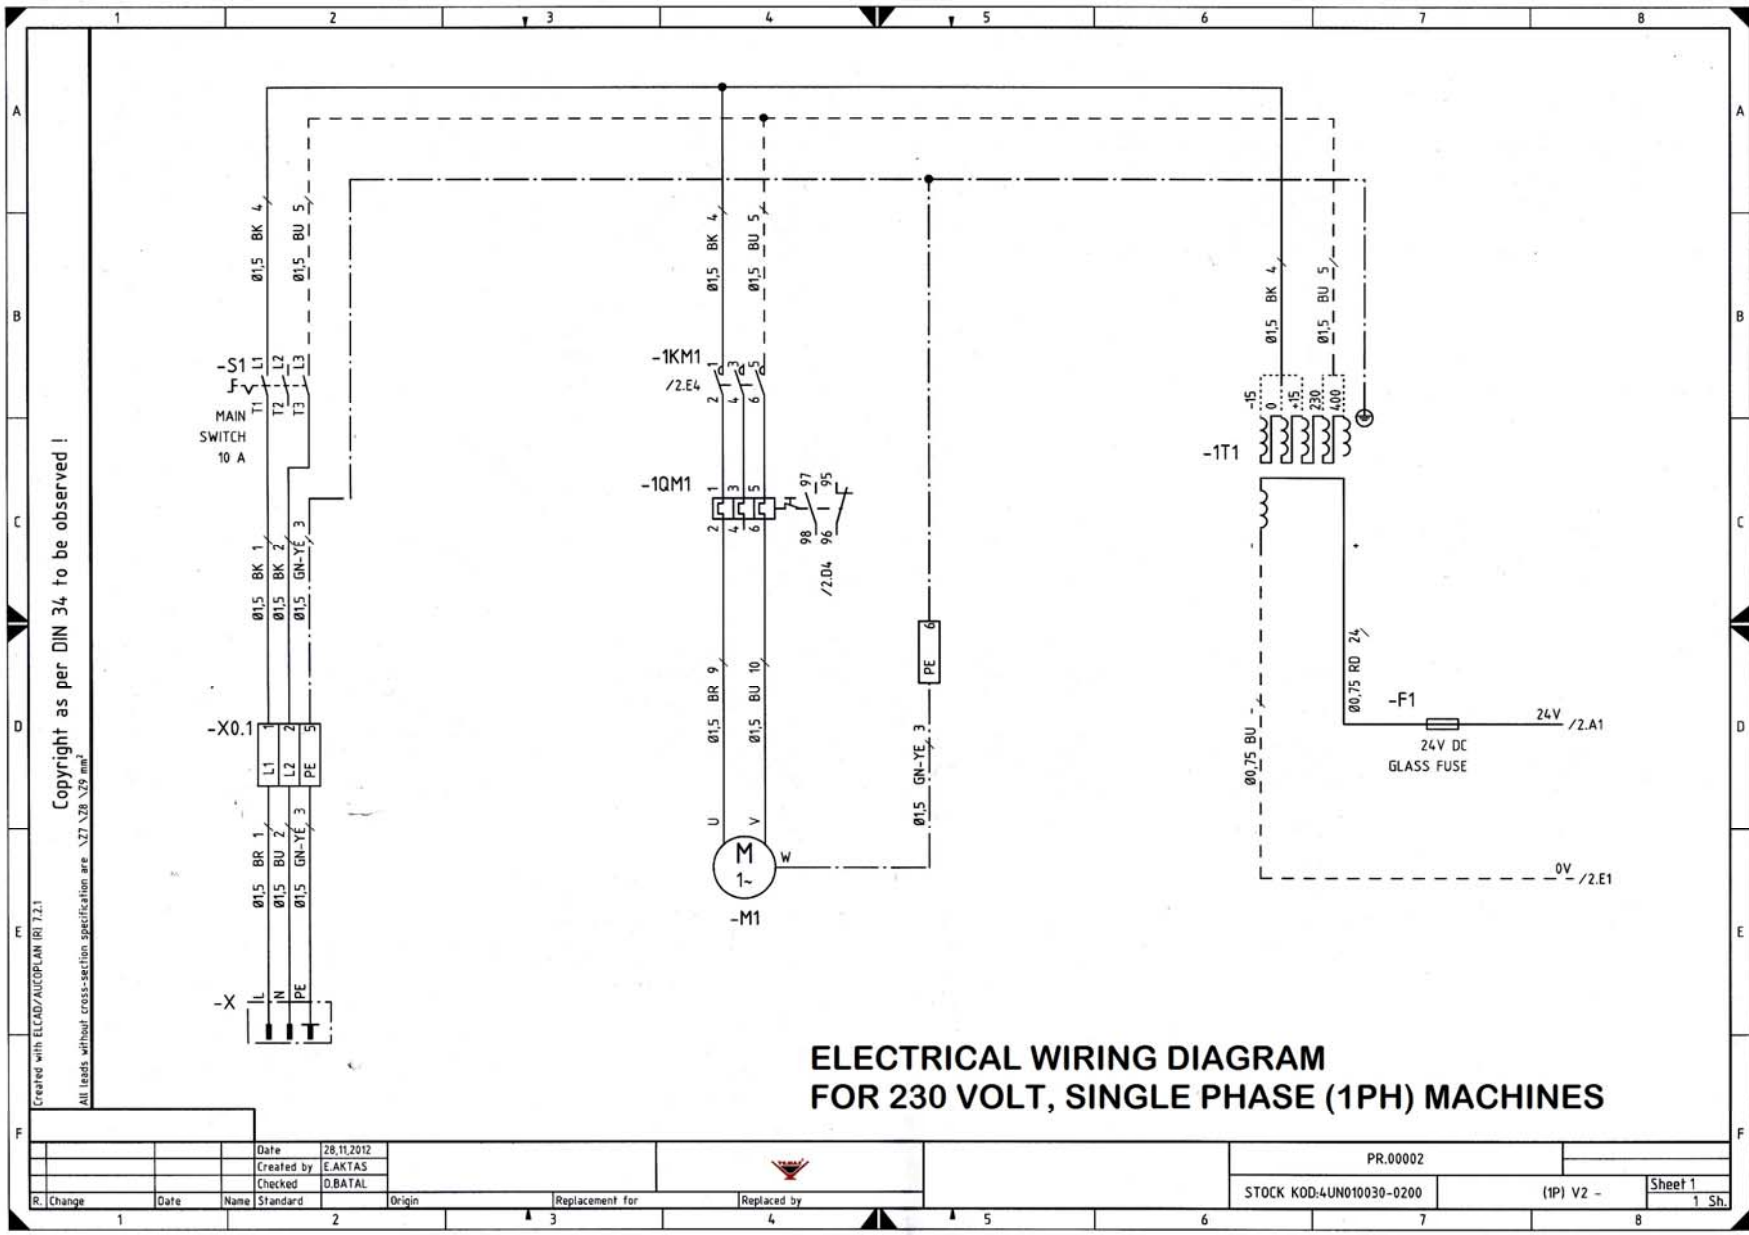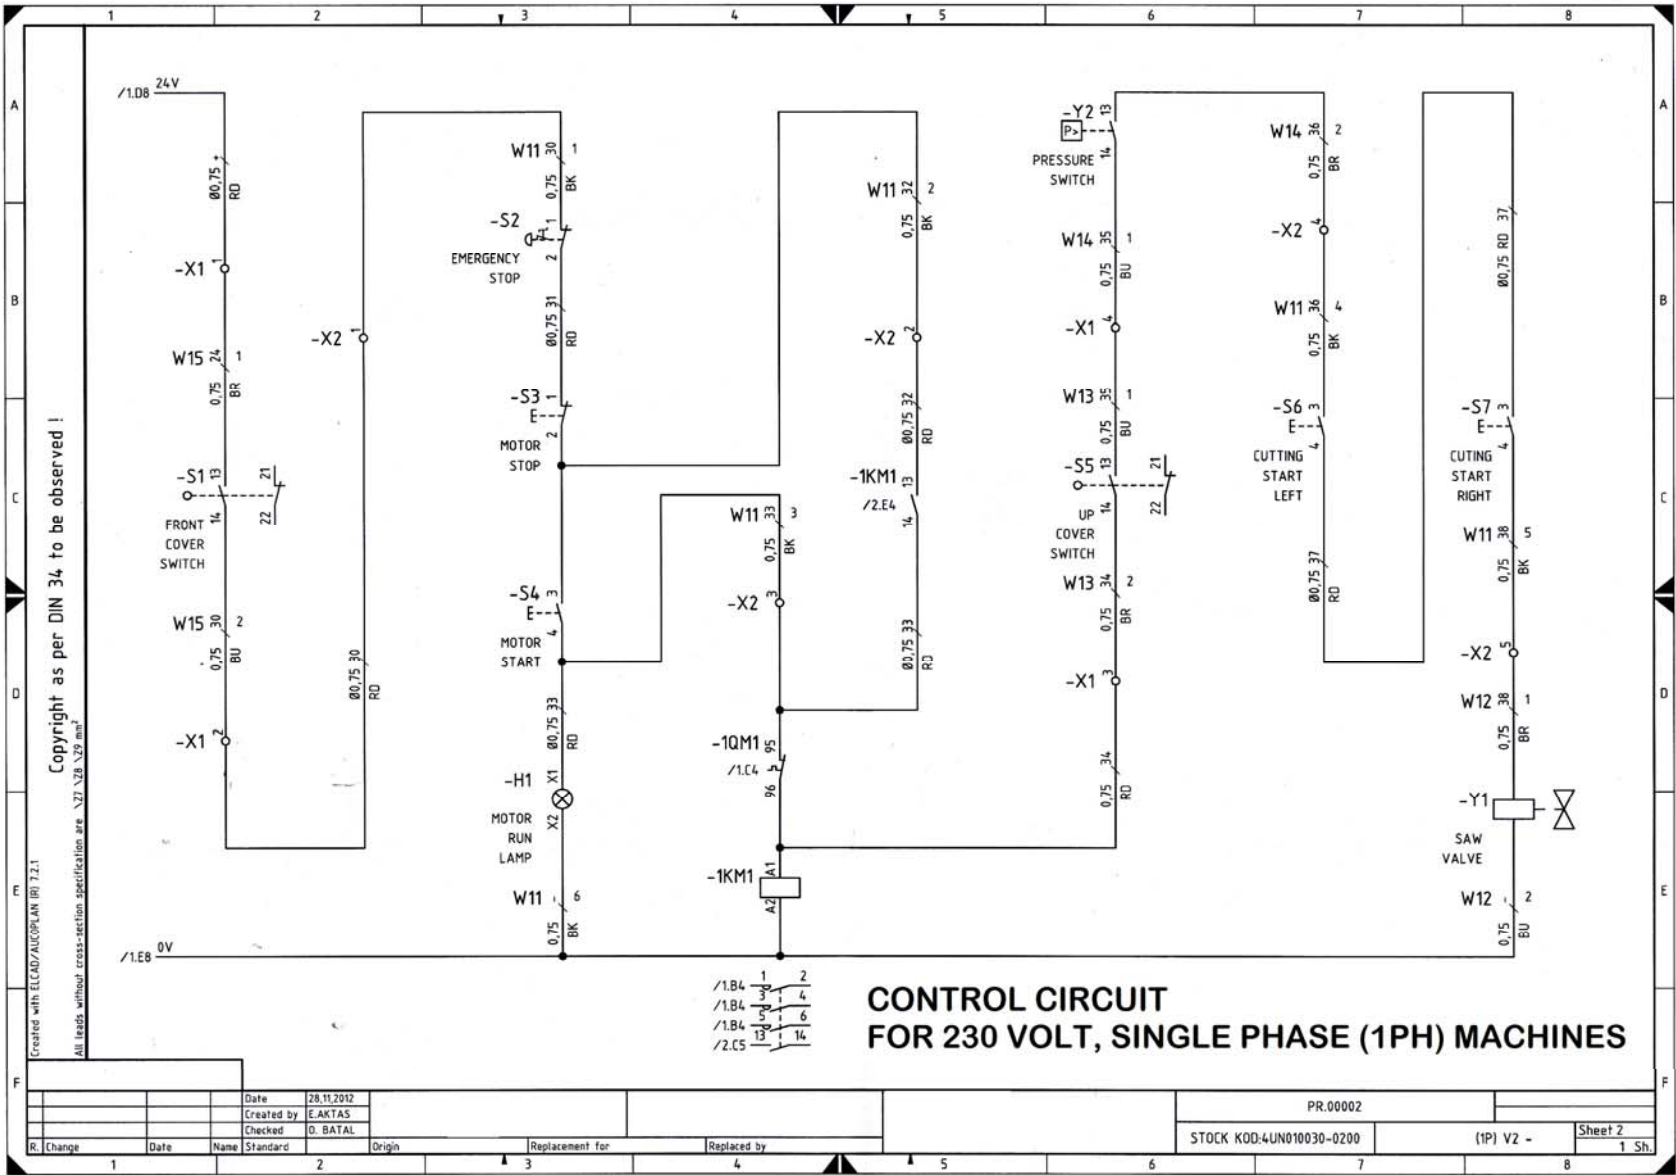
12. WIRING DIAGRAMS

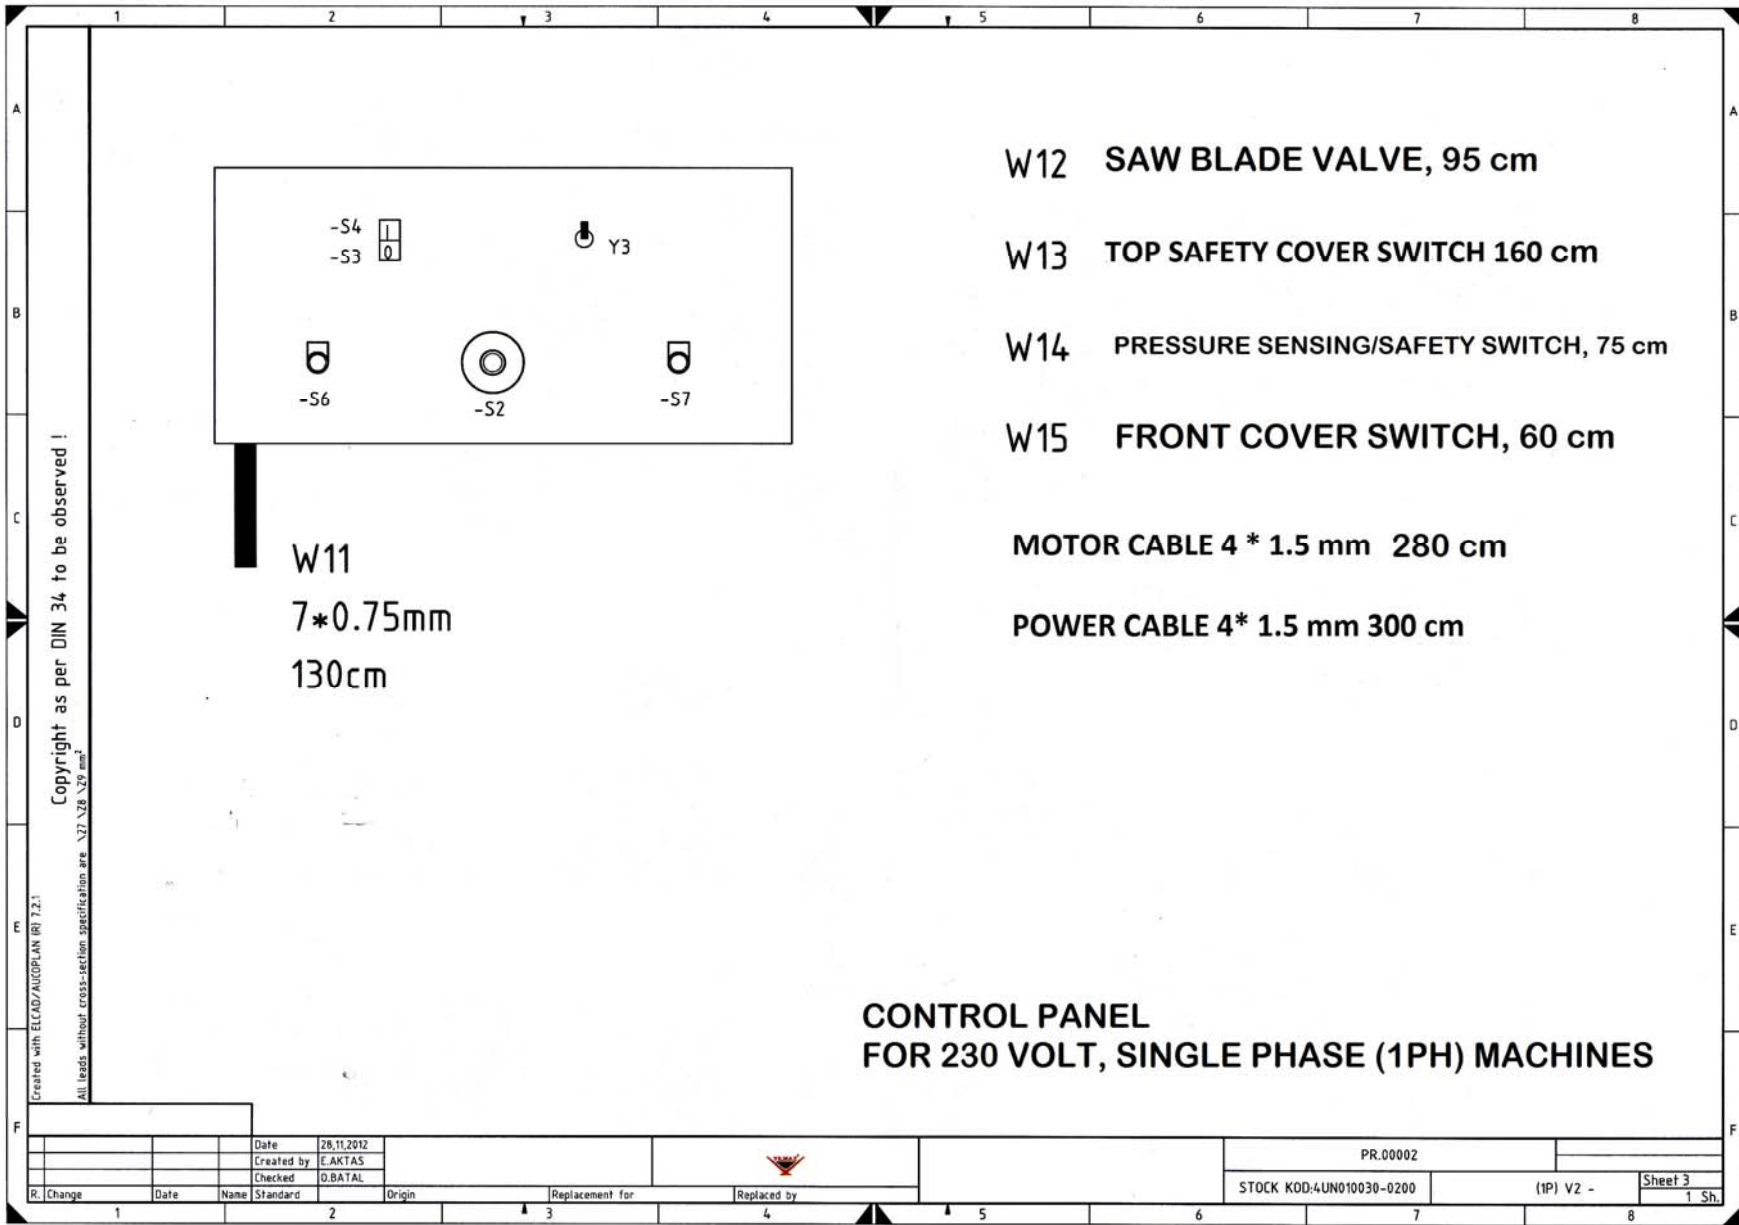













Pos	Designation	Type	Comment
1	-SV1	1PN060000-0001	SERVICE UNTY
2	-Y1	1PN010000-0051	SAW VALVE
3	-Y3	1PN010000-0050	CLAMP VALVE
4	-SP1	1PN010000-0012	OIL SPRAY
5	-OT1	1PL010000-0019	OIL TANK
6	-Y2	1EL020000-0018	PRESSURE SENSOR
7	-H1	-	HYDROCEK
8	-P1	-	CLAMP
9	-P2	-	CLAMP

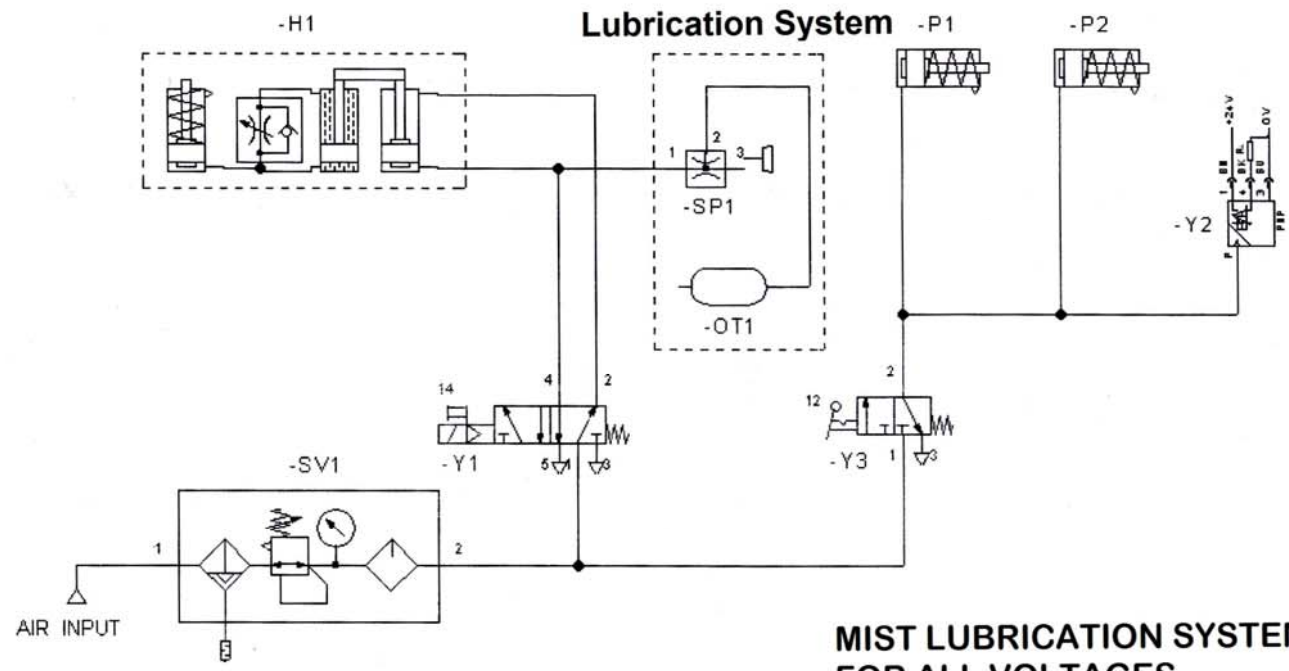


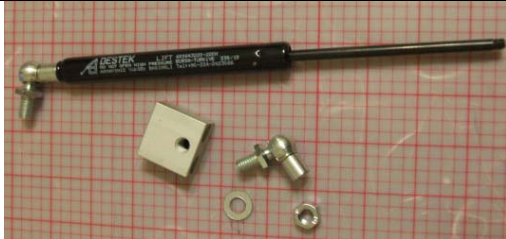



MIST LUBRICATION SYSTEM DIAGRAM FOR ALL VOLTAGES



Aenderung	Datum	Name	Datum	Name
a			gez.	E.KABA
b			gepr.	A.DEMIR
c				
d				




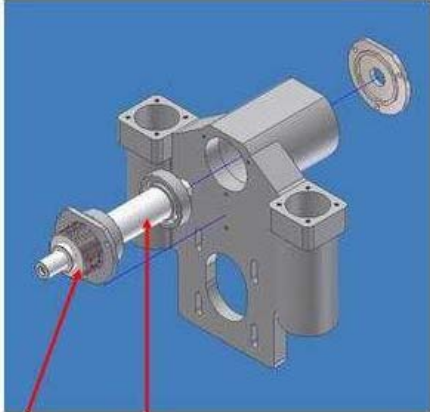
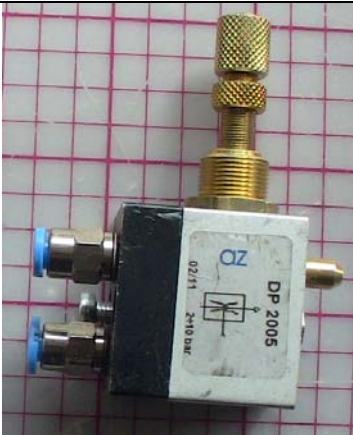
Zeichnungs-Nr.	Anlage	Blatt Nr.	23-01-08
1	Ort	von	
		Blatt	



13. PICTORIAL GUIDE TO USE WHEN ORDERING PARTS FOR THIS MACHINE


We are providing this pictorial guide to help you out when ordering spare parts for this machine. This pictorial guide does not include all parts. For the parts that do not exist here, please refer to the component list provided in the previous pages or call us.

Row #	Part	Picture
2	Saw Blade Belt	
4	Gas spring and its components	
5	Horizontal piston	
6	Hydro-pull system with its hoses.	
7	Hinge for the top safety cover.	

8	Magnetic relay	
9	Main Power Switch	
10	Vertical piston	

11	Y1 valve and its connector components	
12	Left fence	
13	Right Fence	
14	Shaft assembly.	 <p data-bbox="630 1224 769 1287">Saw Blade Pulley</p> <p data-bbox="813 1251 914 1287">Shaft</p>
15	Spray mist lubrication head	

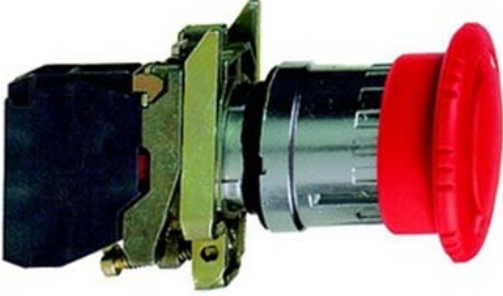18	Emergency Stop Switch	 An emergency stop switch with a red, mushroom-shaped button and a black base with green metal components.
19	Cutting Start Button	 A cutting start button with a green, circular button and a complex metal housing.

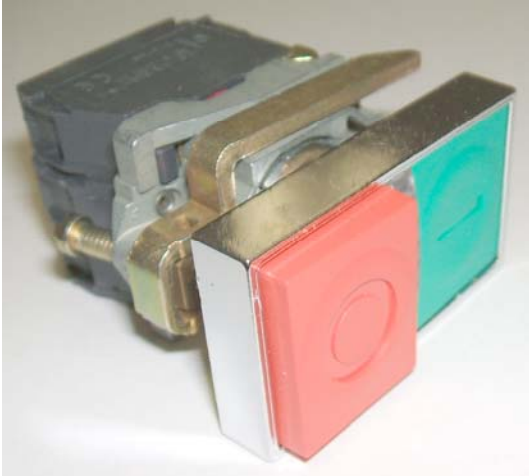20	Motor Start-stop button		
	Motor	(220V-3P 60 Hz. 440V-3P 60 Hz)	1EL070001-0001

